

HOSHIZAKI

Series

KM280M_H
Item # 13067
02/04

KM-280M_H SERIES


SLIM-LINE MODULAR CRESCENT ICE CUBER




DB-130




DB-200



B-300



B-500





B-700



**KM-280MAH Cuber
Shown on Optional
B-300 Bin**

KM-280MAH
Air-Cooled
KM-280MWH
Water-Cooled

ICEMAKER DIMENSION	
Width x Depth x Height	
KM-280M_H	22 x 27 ³ / ₈ x 30 ⁵ / ₁₆ "
DIMENSION BYBIN SIZE	
Width x Depth x Height	
DB-130	22 x 30 x 83 ⁵ / ₁₆ "
DB-200	30 x 30 x 83 ⁵ / ₁₆ "
B-300	22 x 32 ¹ / ₂ x 76 ⁵ / ₁₆ "
B-500	30 x 32 ¹ / ₂ x 76 ⁵ / ₁₆ "
B-700	44 x 32 ¹ / ₂ x 76 ⁵ / ₁₆ "

- Durable stainless steel exterior
- CycleSaver® design 
- EverCheck® alert system 
- Up to 271 lbs. of ice production per 24 hours
- Individual crescent cube
- Stainless steel evaporator
- Removable air filters



Reliability is a beautiful thing™

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269

1-800-438-6087


FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com

SLIM-LINE MODULAR CRESCENT ICE CUBER

KM-280MAH (AIR-COOLED)
KM-280MWH (WATER-COOLED)



■ Up to 271 lbs. of ice production per 24 hours



WARRANTY THREEYEAR - Parts & Labor on entire machine. FIVEYEAR - Parts & Labor on : Evaporator FIVEYEAR - Parts on: Compressor, Air-Cooled Condenser Coil.	STAINLESS STEEL INTERNAL EVAPORATOR	SERVICE Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	R-404 REFRIGERANT	

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.


STORAGE BINS B-300 - 300 lb. Application Capacity (260 lb. ARI-Rated Capacity Bin) B-500 - 500 lb. Application Capacity (360 lb. ARI-Rated Capacity Bin) B-700 - 700 lb. Application Capacity (550 lb. ARI-Rated Capacity Bin) B-800 - 800 lb. Application Capacity (600 lb. ARI-Rated Capacity Bin) B-900 - 900 lb. Application Capacity (660 lb. ARI-Rated Capacity Bin) B-1200 -1200 lb. Application Capacity B-1500 -1500 lb. Application Capacity	
OPERATING LIMITS Ambient Temp Range 45 - 100°F Water Temp Range 45 - 90°F Voltage Range 104-127V Water Pressure 10 - 113 psig	ELECTRICAL & PLUMBING 115/60/1 1/2" OD copper or equivalent independent potable water supply 3/4" independent drain connection

AIR - COOLED				
Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	269	245	219
	80°	251	214	192
	90°	245	188	164


WATER - COOLED				
Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	271	260	249
	80°	263	246	237
	90°	260	234	224

UTILITY CONSUMPTION					
Model Number	Ice Production Per Cycle		KWH per 100 lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal per 100 lbs.
	Lbs.	Cubes			
KM-280MAH	4.7	240	12.0	26.2	NA
KM-280MWH	4.7	240	8.3	28.4	136

SPECIFICATIONS				
Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-280MAH	Air-Cooled	11.6	20	170 lbs.
KM-280MWH	Water-Cooled	10.0	20	170 lbs.

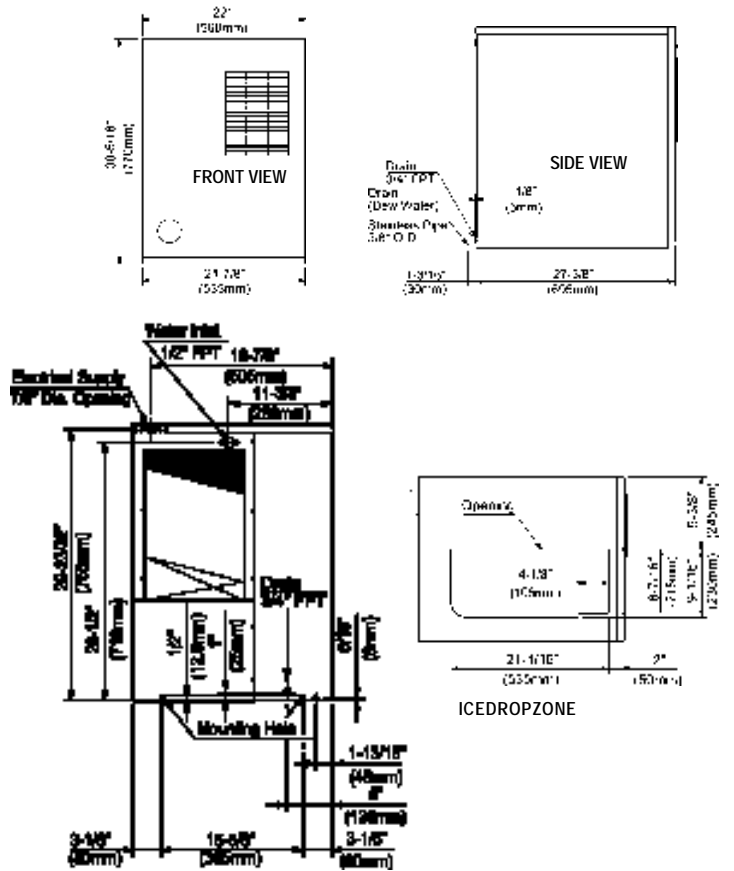

AIR-COOLED UNIT

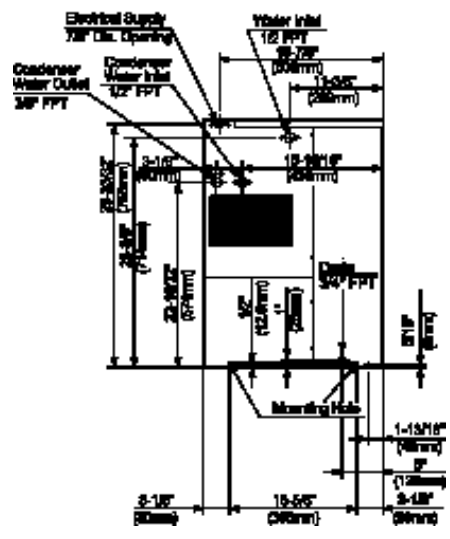

WATER-COOLED UNIT

We reserve the right to change specifications without notice.

© HOSHIZAKI AMERICA, INC.