

# HOSHIZAKI

## Series


KML600M\_H  
Item # 13092 9/03

**KML-600M\_H SERIES**




**KML-600MAH Cuber**  
Shown on Optional  
B-500 Bin

**KML-600MAH**  
Air-Cooled  
**KML-600MWH**  
Water-Cooled  
**KML-600MRH**  
Air-Cooled Remote



B-250



B-500



DB-200

**ICEMAKER  
DIMENSION**

Width x Depth x Height  
**KML-600M\_H**  
30 x 27<sup>3</sup>/<sub>8</sub> x 26

**DIMENSION  
BYBIN SIZE**

Width x Depth x Height  
**B-250**  
30 x 32<sup>1</sup>/<sub>2</sub> x 59<sup>3</sup>/<sub>8</sub>  
**B-500**  
30 x 32<sup>1</sup>/<sub>2</sub> x 72  
**DB-200**  
30 x 30 x 79

• Durable stainless steel exterior

• CycleSaver® design



• EverCheck® alert system



• Up to 635 lbs. of ice production  
per 24 hours

• Individual crescent cube

• Stainless steel evaporator

• Removable air filters



Reliability is a  
beautiful thing™

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269

1-800-438-6087

FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com


**LOW-PROFILE MODULAR CRESCENT CUBER**

# KML600M\_H SERIES

# DIMENSIONS (Inches) - CONNECTIONS

## LOW-PROFILE MODULAR CRESCENT CUBER

- KML-600MAH** (AIR-COOLED)
- KML-600MWH** (WATER-COOLED)
- KML-600MRH** (AIR-COOLED REMOTE)




■ Up to 635 lbs. of ice production per 24 hours



<b>WARRANTY</b> THREEYEAR - Parts & Labor on entire machine. FIVEYEAR - Parts & Labor on : Evaporator FIVEYEAR - Parts on: Compressor, Air-Cooled Condenser Coil.	<b>STAINLESS STEEL INTERNAL EVAPORATOR</b>	<b>SERVICE</b> Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	<b>R-404 REFRIGERANT</b>	

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.

<b>STORAGE BINS</b> B-250 - 250 lb. Application Capacity (230 lb. ARI-Rated Capacity Bin) B-500 - 500 lb. Application Capacity (360 lb. ARI-Rated Capacity Bin) B-700 - 700 lb. Application Capacity (550 lb. ARI-Rated Capacity Bin) B-800 - 800 lb. Application Capacity (600 lb. ARI-Rated Capacity Bin) B-900 - 900 lb. Application Capacity (660 lb. ARI-Rated Capacity Bin) B-1200 - 1200 lb. Application Capacity B-1500 - 1500 lb. Application Capacity		<b>ELECTRICAL &amp; PLUMBING</b> 208-230/60/1 (3 wire with dedicated neutral for 115V) 15 amp Max Fuse/HACR Breaker Size 1/2" OD copper or equivalent independent potable water supply 3/4" independent drain connection
<b>OPERATING LIMITS</b> Ambient Temp Range 45 - 100°F Water Temp Range 45 - 90°F Voltage Range 187-253V Water Pressure 10 - 113 psig		

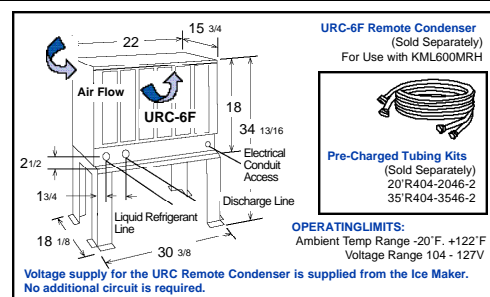

AIR - COOLED				
Water Temp ° F.	50°	70°	90°	
Air Temp ° F.	70°	631	596	542
	80°	605	551	492
	90°	575	513	455

WATER - COOLED				
Water Temp ° F.	50°	70°	90°	
Air Temp ° F.	70°	602	586	559
	80°	589	564	536
	90°	586	546	518

AIR - COOLED REMOTE				
Water Temp ° F.	50°	70°	90°	
Air Temp ° F.	70°	635	610	574
	80°	616	577	540
	90°	610	550	512

UTILITY CONSUMPTION					
Model Number	Ice Production Per Cycle		KWH per 100 lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal per 100 lbs.
	Lbs.	Cubes			
KML-600MAH	10	480	7.0	30	NA
KML-600MWH	10	480	5.6	29.0	103
KML-600MRH	10	480	7.4	39.1	NA

SPECIFICATIONS				
Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KML-600MAH	Air-Cooled	8.7	15	205 lbs.
KML-600MWH	Water-Cooled	8	20	205 lbs.
KML-600MRH	Air-Cooled Remote	9.5	15	205 lbs.

