

3600 Manual Slicer



Model

_ 3600 Manual Slicer

Options

_ Prison package
_ High moisture application package

Standard Features

• Motor

- Gear driven
- 1/2 HP knife motor
- White indicator light
- No voltage release

• Other

- Full stainless steel construction
- Precision dual gear table adjustment
 - 0 to 1 1/4" slice thickness
- Antimicrobial protection
- Full gravity feed - 45° angle
- 3 lb. stainless steel end weight
- Signature sharpening system
 - One step, single lever
 - 2 stones, all metal housing
 - Permanently mounted
- Hollow ground knife
- Safe knife cleaning
 - Permanently attached knife ring guard
 - Knife cover interlock
- Cleaning brace to facilitate cleaning
- 7 foot cord and plug

• Optional Accessories

- _ 17" food chute
- _ Aluminum food chute
- _ Stainless steel knife
- _ Front mounted endweight
- _ Low food fence
- _ High food fence
- _ 3" extension legs
- _ 10 lb. portion control scale
- _ Vegetable hopper
- _ Slicer cover

• Standard Warranty

- 2 year parts and 1 year labor

Superior Service

Manual Slicer

3600

Superior Service

www.superiorservice.net

1006 E. South St.
Anaheim, CA 92805
Phone: 888-888-4121
Fax: 714-502-0236

3600 Manual Slicer



Superior Service

Manual Slicer

3600

Printed in U.S.A. 2-2004
Finish: EXCLUSIVE ONE-PIECE #304 STAINLESS STEEL base with radiused corners improves sanitation and durability. Other stainless steel parts include the food chute, slicer table, end weight, and knife cover.

Knife Motor: Powerful 1/2 HP, 115-60-1, 7 amp, air cooled, permanently lubricated sealed ball bearings. Solid state start relay.
Knife Drive: Cross axis helical gear drive design. This positive drive design assures nonslip, trouble free operation.

Slice Thickness: Precision gear adjustment holds thickness setting for consistent cuts and allows hot or cold foods to be sliced from tissue thin up to 1 1/4" thick.

Antimicrobial Protection: Table adjustment knob, on/off tab, sharpener cover knob, and food chute handle have antimicrobial protection.

Full Gravity Feed: Full 45° angle feed requires less mechanical pressure. Equipped with a 3 lb. STAINLESS STEEL end weight to minimize waste and hold product. The end weight swings away for storage behind chute. The food chute handle is ergonomically designed.

On/Off Tab: Moisture protected toggle type, operated by a push-pull rod.

Cord & Plug: Attached 7 foot flexible 3 wire cord and plug fits a grounded receptacle.

Knife Cover Interlock: Slicer will not operate with knife cover removed.
Knife Ring Guard: Permanently mounted knife ring guard protects the non-slicing portion of the knife. Slicer table protects leading edge of knife when completely closed.

Top Mounted Sharpener: Sharpener is made of all metal and is permanently mounted on the slicer. A single lever activates the large grinding and honing stones.

Hollow Ground Knife: Nominal 12" diameter special hardened steel alloy with stain resistant finish and sanitary hub.

No Voltage Release: Prevents inadvertent reactivation of slicer in the event of power or interlock interruption. Operator must restart slicer.

Capacity: Holds round pieces up to 7 1/2" (19 cm) in diameter and flat pieces up to 12" (30 cm) in width.

White Indicator Light: A readily visible light illuminates when knife is rotating.

Cleaning Brace: A metal brace under the slicer drops into position, tilting the slicer to facilitate countertop cleaning.

Dimensions:

Foot Print = 13.75" x 21.25"
(34.9 cm x 54 cm)

Overall Length = 25" (63.5 cm)

Overall Width = 22" (55.9 cm)

Overall Height = 21" (53.3 cm)

Freight Class: 77.5

Net Weight: 103 lbs. (47 kgs.)

Shipping Weight: 125 lbs. (56.6 kgs.)

Box Dimensions:

28"W x 25"D x 28"H

(71.1cm W x 63.5cm D x 71.1cm H)

Factory Installed Options:

17" food chute

Stainless steel knife

Endweight with meat prongs

Front mounted endweight

Aluminum food chute

High moisture application package

Prison package

Optional Accessories:


Food fences

3" extension legs

10 lb. Portion control scale

Vegetable hopper

Slicer cover

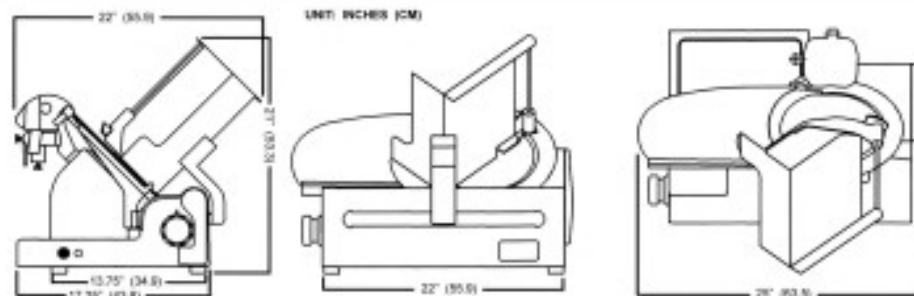

Superior Service

www.superiorservice.net

1006 E. South St.
Anaheim, CA 92805
Phone: 888-888-4121
Fax: 714-502-0236